


reflex 'Hot water heaters'

reflex 'SB, SF Hot water heaters'

- ▶ floor standing indirect fired water heater
- ▶ heavy duty S235JRG2 (RSt 37-2) quality steel
- ▶ corrosion resistant glass-lined tank according to German DIN 4753
- ▶ magnesium anode rod(s) for tank protection
- ▶ high capacity, low pressure-drop glass-lined heat exchanger
- ▶ factory mounted thermometer
- ▶ extra thick (50-80 mm) PU-foam insulation
- ▶ 'SB' steel jacket in various colours, 'SF' foil jacket in various colours
- ▶ clean-out and inspection access
- ▶ max. operating pressure: 10 bar (tank), 16 bar (coil)
- ▶ max. operating temperature: 95 °C (tank), 110 °C (coil)

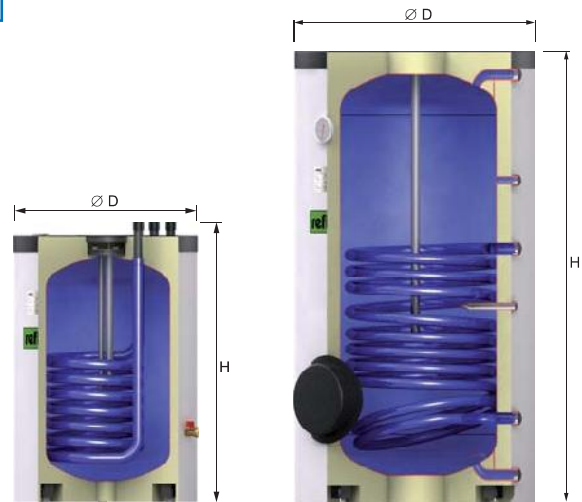

SF 120

SB 100, 150 - 1000


Type	Article-No.				Weight kg	Product group	Ø D mm	H mm
	blue	orange	silver	white				
SB 100	7763000	7763100	7763900	7763800	38	60	512	849
SF 120	---	---	---	7759600	42	60	560	800
SB 150	7750100	7750600	7764100	7763600	54	60	540	1222
SB 200	7750200	7750700	7764200	7763300	65	60	540	1473
SB 300	7750300	7750800	7764300	7763400	99	60	700	1334
SB 400	7750400	7750900	7764400	7763500	119	60	700	1631
SB 500	7750500	7751000	7764500	7763700	170	60	700	1961
SF 750*	---	---	---	7754600	227	60	910 ¹	2000 ¹
SF 1000*	---	---	---	7754700	288	60	1010 ²	2025 ²
SF 1500*	---	---	---	7800700	401	52	1200 ³	2216 ³
SF 2000*	---	---	---	7800800	571	52	1400 ⁴	2126 ⁴

- * - 'SF 750 and 1000' are delivered with 2 built-in anodes
 - PU soft foam jacket (white) will be delivered in a separate package.
 - 'SF 1500 and 2000' are delivered with 1 power anode

- 1) without insulation Ø D = 750 mm, H = 1932 mm
 2) without insulation Ø D = 1000 mm, H = 2019 mm
 3) without insulation Ø D = 850 mm, H = 1959 mm
 4) without insulation Ø D = 1200 mm, H = 2019 mm

reflex 'US Hot water heaters'

- ▶ horizontal indirect fired water heater
- ▶ heavy duty S235JRG2 (RSt 37-2) steel
- ▶ corrosion resistant glass-lined tank according to German DIN 4753
- ▶ magnesium anode rod for tank protection
- ▶ high capacity, low pressure-drop glass lined heat exchanger
- ▶ factory mounted thermometer
- ▶ extra thick PU-foam insulation
- ▶ steel jacket in various colours
- ▶ robust frame to carry 240 kg
- ▶ max. operating pressure: 10 bar (tank), 16 bar (coil)
- ▶ max. operating temperature: 95 °C (tank), 110 °C (coil)

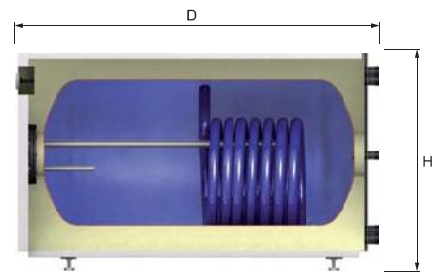

Type	Article-No.				Weight kg	Product group	H mm	D mm
	blue	orange	silver	white				
US 150	7762000	7762100	7765000	7761900	72	62	590	995
US 250	7762500	7762600	7765100	7761300	99	62	644	1095

reflex 'Solar hot water heaters'

reflex 'SB/2, SF/2 Solar hot water heaters'

- ▶ floor standing indirect fired/solar water heater
- ▶ heavy duty S235JRG2 (RSt 37-2) quality steel
- ▶ corrosion resistant glass-lined tank according to German DIN 4753
- ▶ magnesium anode rod(s) for tank protection
- ▶ high capacity, low pressure-drop glass-lined heat exchangers
- ▶ factory mounted thermometer
- ▶ extra thick (50-80 mm) PU-foam insulation
- ▶ opening for an additional electrical heating element
- ▶ 'SB' steel jacket in various colours, 'SF' foil jacket in various colours
- ▶ clean-out and inspection access
- ▶ max. operating pressure: 10 bar (tank), 16 bar (coil)
- ▶ max. operating temperature: 95 °C (tank), 110 °C (coil)



Type	Article-No.					Weight kg	Product group	Ø D mm	H mm
	blue	orange	silver	white	grey				
SF 200/2	---	---	---	7743400	---	72	61	540	1473
SB 300/2	7740500	7760600	7741600	7742200	---	106	61	600	1834
SF 300/2	---	---	---	---	7753300	106	61	700	1334
SB 400/2	7761200	7767100	7742300	7742400	---	130	61	700	1631
SB 500/2	7757000	7740700	7741700	7707500	---	160	61	700	1961
SF 750/2*	---	---	---	7743200	---	217	61	910 ¹	2000 ¹
SF 1000/2*	---	---	---	7743300	---	275	61	1010 ²	2025 ²
SF 1500/2*	---	---	---	7800750	---	495	52	1200 ²	2216 ²
SF 2000/2*	---	---	---	7800850	---	670	52	1400 ²	2126 ²

* PU soft foam jacket (white) will be delivered in a separate package

¹⁾ without insulation Ø D = 750 mm, H = 1932 mm
²⁾ without insulation Ø D = 850 mm, H = 1959 mm