

NEW ARI FLAT 0,8 kW. LESS POWER, SAME COMFORT.




EFFICIENCY & COMFORT

Thanks to their SMART DOUBLE TANK structure, they heat water more quickly compared with a traditional water heater with lower power.

MULTIPOSITION INSTALLATION


ECO EVO FUNCTION

Thanks to ECO EVO Powered by CoreTECH, ARI FLAT remember when and how much hot water you use. Without no effort, you can have the hot water you need, when you need it saving up to 14% of energy consumption.

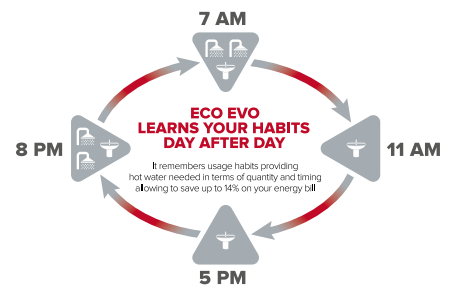

SAVE YOUR BUDGET!

With ARI FLAT 0,8 kW you can save up to 47% of your power peak loading and 14% of electric consumption.

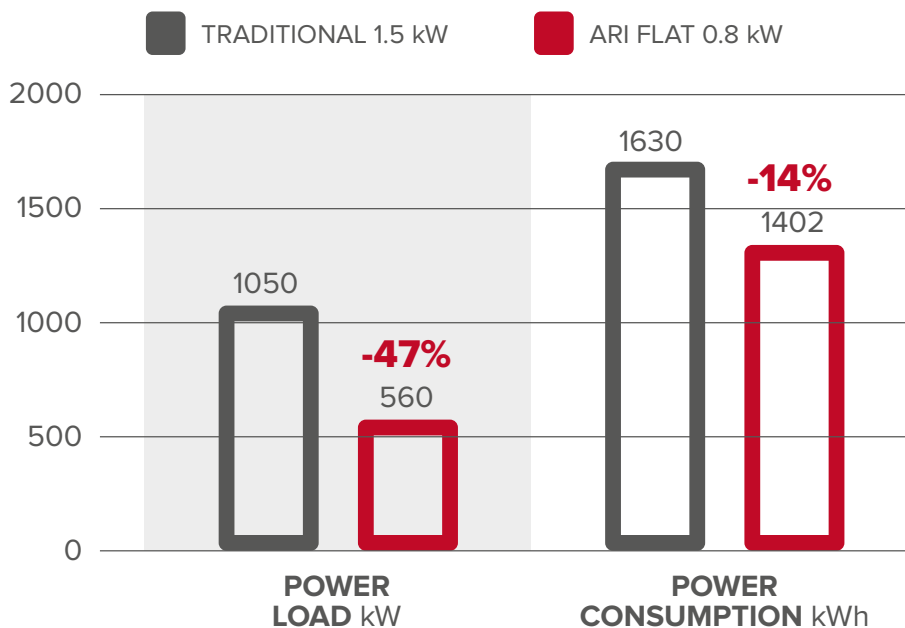

BUILDING 250 APARTMENTS



ARI FLAT 0,8 kW

ECO EVO
FUNCTIONSAFETY
PACKAGEDISPLAY
SMARTSHOWER
READYTITANIUM
PLUSINCOLOY
ENAMELLED
HEATING ELEMENT

FLAT



MULTIPOSITION



COMFORT

- Double tank structure and smart quick heating function: shower ready in 50 minutes
- Smart touch screen Blue Tech display showing the number of showers available and waiting time for the next shower
- Smart Wi-Fi connection
- Super silent water heating

EFFICIENCY&ENERGY SAVING

- Eco Evo powered by CoreTECH
- Ecological polyurethane insulation

QUALITY

- Everlasting anode
- ABS 2.0 safety system in case of energy or water failures
- Titanium enamelled double tank for a long durability


DESIGN

- Multiposition installation
- Only 27 cm deep
- Exclusive Italian design
- Silver metal finishing, to blend and fit the furniture of your bathroom

only
0,8 kW



علامة الجودة الإماراتية
Emirates Quality Mark

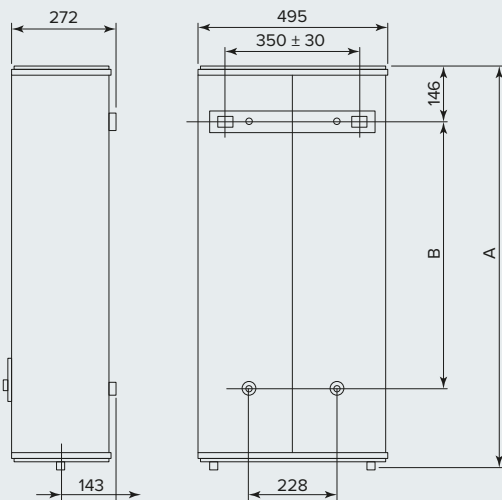

TECHNICAL DATA

		ARI FLAT 50 0,8K	ARI FLAT 80 0,8K	ARI FLAT 100 0,8K
Capacity	l	50	80	100
Installation		Multiposition (V/H)	Multiposition (V/H)	Multiposition (V/H)
Power	kW	0,8	0,8	0,8
Voltage	V	230	230	230
Time for 1 st shower	h,min	1,30	1,30	1,30
Max pressure	bar	8	8	8
Max working temperature	°C	80	80	80
Weight	kg	21,7	28,3	32,2
Standing loss at 65°C	kWh/24h	1,1	1,5	1,6
IP		IPX4	IPX4	IPX4
Energy class		B	B	B
Tapping profile		M	M	M

OVERALL DIMENSIONS

		ARI FLAT 50 0,8K	ARI FLAT 80 0,8K	ARI FLAT 100 0,8K
a	mm	759	1049	1234
b	mm	405	695	880

CODE

	ARI FLAT 50 0,8K	ARI FLAT 80 0,8K	ARI FLAT 100 0,8K
CODE	3700494	3700495	3700496